


## QLRIDPA

### Reduction


| Code          | Gr  | D  | D1 | L   | E  | E1 | C  | C1 |
|---------------|-----|----|----|-----|----|----|----|----|
| QLRIDPA025020 | 120 | 25 | 20 | 101 | 51 | 45 | 52 | 48 |
| QLRIDPA032025 | 178 | 32 | 25 | 115 | 61 | 51 | 62 | 52 |
| QLRIDPA040025 | 230 | 40 | 25 | 125 | 75 | 61 | 70 | 52 |
| QLRIDPA040032 | 290 | 40 | 32 | 133 | 75 | 51 | 70 | 62 |
| QLRIDPA050040 | 450 | 50 | 40 | 151 | 87 | 75 | 79 | 70 |

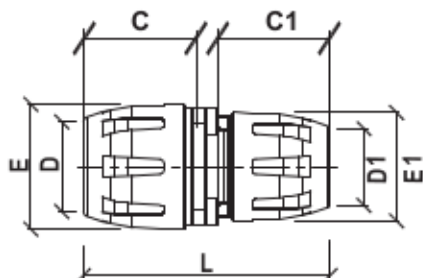

## QLGO90PM

### 90° Elbow, male thread

| Code           | Gr. | D  | d    | L  | E  | C  |
|----------------|-----|----|------|----|----|----|
| QLGO90PM020048 | 68  | 20 | 1/2" | 78 | 45 | 48 |
| QLGO90PM025048 | 95  | 25 | 1/2" | 87 | 51 | 52 |
| QLGO90PM025068 | 95  | 25 | 3/4" | 87 | 51 | 52 |

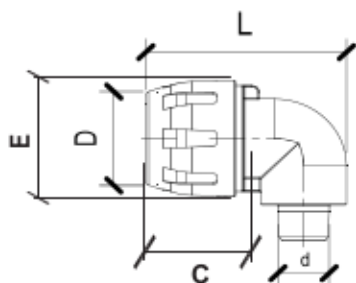

### Legend

|         |                                     |
|---------|-------------------------------------|
| α       | Angular                             |
| C       | Socket depth                        |
| C1      | Socket depth 1                      |
| D       | Socket diameter                     |
| D1      | Socket diameter 1                   |
| Dp      | Hollow mill driving diameter        |
| Dpt     | Largeness                           |
| d       | Thread diameter                     |
| d1      | Thread diameter 1                   |
| d2      | Thread diameter 2                   |
| d3      | Thread diameter 3                   |
| E       | Overall outside diameter ring nut   |
| E1      | Overall outside diameter ring nut 1 |
| Gr      | Weight in grams                     |
| H       | Height                              |
| On      | holes number                        |
| L       | Length                              |
| L1      | Length 1                            |
| L2      | Length 2                            |
| L Axial | Axial Length / Wheelbase            |
| I       | Misalignment                        |
| I1      | Misalignment 1                      |
| r       | Curvature radius (max)              |